



9320/K2 – Double wireless keychain button

1- Safety Instructions

Warning: Failure to follow the safety instructions below could result in damage to your Wireless Button or other property. Read all safety instructions below before using your Wireless Button.

- Avoid high humidity or extreme temperatures;
- Avoid prolonged exposure to sunlight or strong UV light;
- Do not drop or subject the unit to strong vibrations;
- Do not disassemble or attempt to repair the unit;
- Do not bring into contact with flammable liquids, gases and other explosive substances.


2 – Welcome

Introducing your Wireless Keychain Double Button.

This button is self-powered by a small piezoelectric circuit inside and allows you to control the FEB Easy series actuators without ever having to worry about changing batteries. You can use a single button to control more than one actuator and use multiple buttons to control the same actuator. Each of the two buttons can be used independently, or in combination, for example, to control the raising and lowering of a roller shutter control.

In this guide you will find an overview of the product and instructions for installation and start-up.

3 – A detailed look at your device

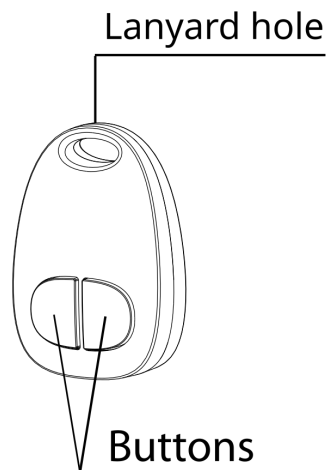

Your Wireless Double Button 9320/K2

- **Buttons:** the two independent parts to press to send a signal
- **Lanyard hole:** You can use these holes to attach the button to a key ring or chain.

4 – Installation

The 9320/K2 button does not require installation, but is designed to be always portable, thanks to its small size and the hole for attaching key rings or chains.

5 - Start-up

- To pair the 9320/K2 to an actuator, simply press the actuator pairing button for about 3 seconds, until the LED indicator starts flashing, then press the 9320/K2 button. You only need to press once. You will see that the actuator LED will stop flashing, indicating that the two have been paired. You can connect more than one button to the same actuator, up to a maximum of 10 buttons. There is no limit, however, to the number of actuators that can be controlled by the same button, simply repeat the pairing procedure between the button and all the actuators that you want to be controlled by the same button.
- To reset a connection between the actuator and the button, press the actuator pairing button for about 12 seconds. When you press the button, the LED indicator will first start flashing, briefly stay on, and then go off. When this sequence is complete and the LED is off, you can release the pairing button and the actuator and button will be disconnected.

6 – Technical features

Wireless Network: RF 433MHz

Operating Distance: Indoor \leq 25m / Outdoor \leq 60m

Operating Temperature: -5 - +50°C

Dimensions: 34 x 52 x 16 mm